


2010 Chevrolet Equinox

Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

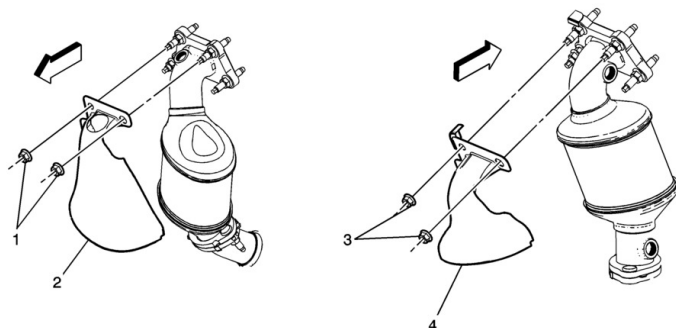

Catalytic Converter Heat Shield Replacement

Callout

Component Name

Preliminary Procedure

Raise and support the vehicle. Refer to Lifting and Jacking the Vehicle

Catalytic Converter Nuts (Qty: 2)

Caution: Refer to Fastener Caution.

Procedure

- 1
 1. Clean and inspect the studs on the engine cylinder head, replace as necessary.
 2. Verify that the studs are fully seated. Stud collar should touch the surface of the engine cylinder head.
 3. Tighten nuts in a criss-cross pattern.

Tighten

- First Pass: 20 Y (15 lb ft)
- Final Pass: 46 Y (34 lb ft)

- 2 Catalytic Converter Heat Shield-Left

Catalytic Converter Nuts (Qty: 2)

Caution: Refer to Fastener Caution.

Procedure

- 3
 1. Clean and inspect the studs on the engine cylinder head, replace as necessary.
 2. Verify that the studs are fully seated. Stud collar should touch the surface of the engine cylinder head.
 3. Tighten nuts in a criss-cross pattern.

Tighten

- First Pass: 20 Y (15 lb ft)
- Final Pass: 46 Y (34 lb ft)

- 4 Catalytic Converter Heat Shield-Right

