


...the front steering axis is  
 ...away from the vertical.  
 ...negative. Caster is positive  
 ...negative. Caster is calcula-  
 ...straight but one can see the  
 ...arm. You will see from the  
 ...aligned if the caster angle  
 ...degrees. If the vehicle has  
 ...lower ball joint would be  
 ...wheel drive front sus-  
 ...adjustments can be made  
 ...axles by the use of ta-  
 ...e springs and the axle.

the front wheels from  
 from the front of the  
 s tilt outward at the  
 When the wheels tilt  
 ber is negative. The  
 ative camber is mea-  
 ertical and the mea-  
 ngle. Camber is de-  
 all four wheel drive  
 adjustments can be  
 nt axles by the use  
 in the spindle and  
 jor corrections re-  
 pment.

**ADJUSTMENTS**

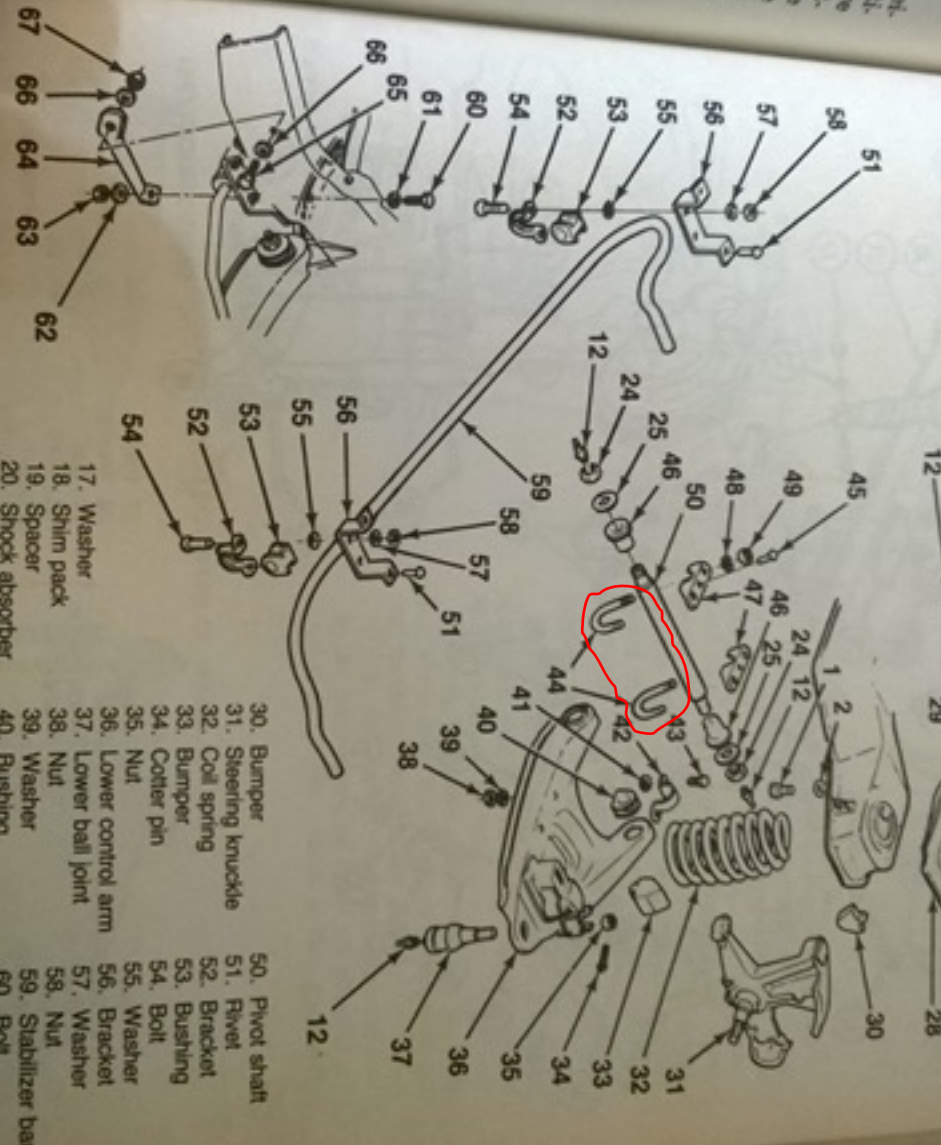

- 17. Washer
- 18. Shim pack
- 19. Spacer
- 20. Shock absorber

- 30. Bumper
- 31. Steering knuckle
- 32. Coil spring
- 33. Bumper
- 34. Cotter pin
- 35. Nut
- 36. Lower control arm
- 37. Lower ball joint
- 38. Nut
- 39. Washer
- 40. Bushing

- 50. Pivot shaft
- 51. Rivet
- 52. Bracket
- 53. Bushing
- 54. Bolt
- 55. Washer
- 56. Bracket
- 57. Washer
- 58. Nut
- 59. Stabilizer bar
- 60. Bolt